


Mechanical In-Line Splice  
with Moisture/Contaminant  
Block for Medium/High  
Voltage Applications

## MECHANICAL CONNECTORS

### 'USMF' Aluminium In-Line Splices

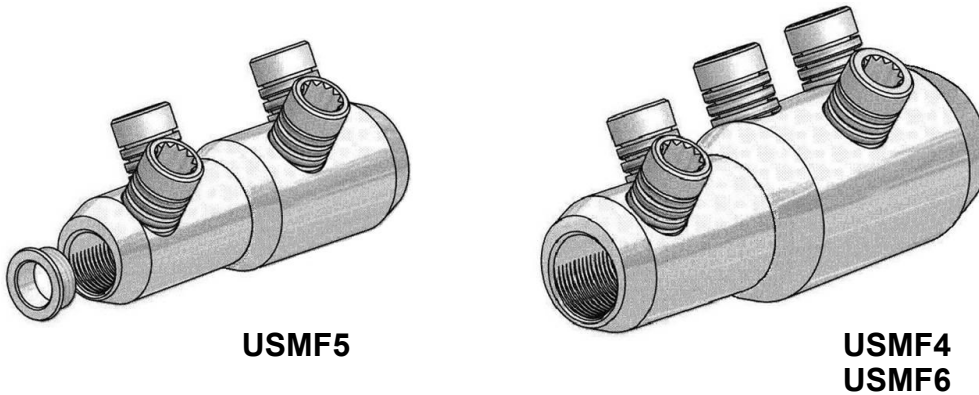

USMF5

USMF4  
USMF6

#### Principle Application:

Straight jointing of circular stranded aluminium or copper conductors for all cable voltages up to and including 46kV.

#### Range:

Connector Reference	Stranded Core Size			
	Min	Max	Min	Max
USMF4	1/0 (53mm <sup>2</sup> )	500 kcmil (253mm <sup>2</sup> )	500 kcmil (253mm <sup>2</sup> )	1000 kcmil (507mm <sup>2</sup> )
USMF5*	# 2 (34mm <sup>2</sup> )	250 kcmil (127mm <sup>2</sup> )	4/0 (107mm <sup>2</sup> )	500 kcmil (253mm <sup>2</sup> )
USMF6	4/0 (107mm <sup>2</sup> )	350 kcmil (177mm <sup>2</sup> )	350 kcmil (177mm <sup>2</sup> )	750 kcmil (380mm <sup>2</sup> )

The '**USMF**' range of mechanical connectors incorporate an integral moisture/contaminant block and utilise the patented universal range taking shear bolts. (USA Patent No's 6209424 & 6321624)

The appropriate socket is to be used at all times, typical examples shown below.




'JTS/9' 1/2" sq Driver

Mechanical In-Line Splice  
with Moisture/Contaminant  
Block for Medium/High  
Voltage Applications

## 'USMF' Aluminium In-Line Splices

### Physical Dimensions:

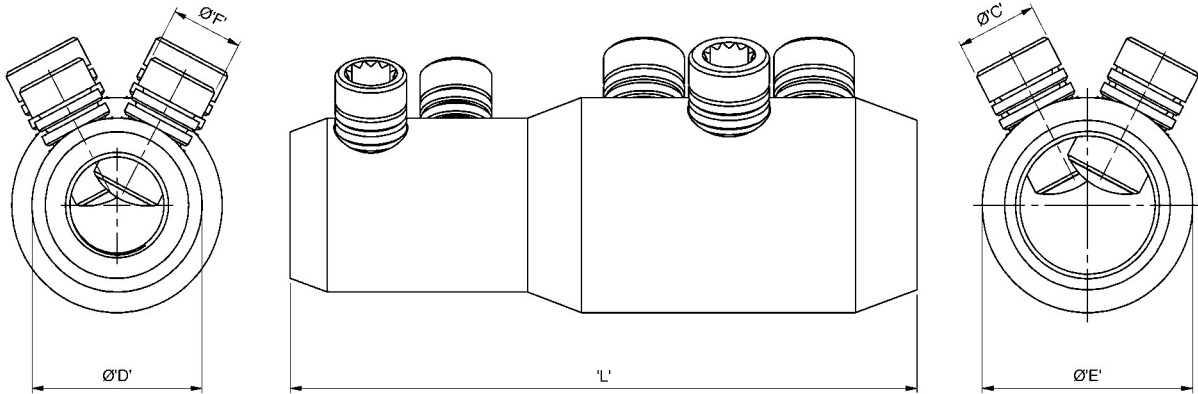

Connector Reference	Dimensions				
	'L'	'ØC'	'ØD'	'ØE'	'ØF'
USMF4	5.51" (140mm)	M18	1.50" (38mm)	1.85" (47mm)	M16
USMF5*	4.33" (110mm)	M16	1.14" (29mm)	1.34" (34mm)	M16
USMF6	5.33" (135.5mm)	M18	1.25" (32mm)	1.47" (37.5mm)	M16

**Material:** Aluminium Alloy (Electro-Tinned)

**Test Specification:** ANSI C119.4 Class 2 Partial Tension

**Test Report No:** TTR/271 & TTR/272

### Fitting instructions:

1. Strip insulation from each core equal to the depth of the bore.
2. Wire brush the exposed conductor cores and wipe clean (optional).
3. Align and position the conductor cores in each of the bores ensuring that the core is fully inserted to the centre wall.
4. Fit the universal shear screws within the connector and torque tighten one turn at a time, using the correct socket, until the bolts have sheared.

**\*IMPORTANT:** When using the USMF5 the centralising ring must be used on cable sizes #2 to 2/0 AWG, inclusive.